

PxxxxSx series

Thyristor Surge Suppressors(TSS)



V_{DRM}: 5~390 Volts

I_{pp}: 45~100 A

Package: SMB


Features

- NH'S Glass Passivated Chip Technology
- Wave And Reflow Solderable
- Low Capacitance Making Them Ideal For High-speed Transmission Equipment
- Very Fast Response Time To Surge Voltage
- Eliminate Hysteresis And Heat Dissipation Typically Found With Clamping Devices
- Eliminates Overvoltage Caused By Fast Rising Transients
- For Surface Mounted Applications In Order To Optimize Board Space


Typical Applications

- Power Port And RS-485/RS-232/RS-422
- Communication And Data Port
- Audio/Video Line,Network And Telecom
- Data Lines And Security Systems

Diagram:



Polarity:

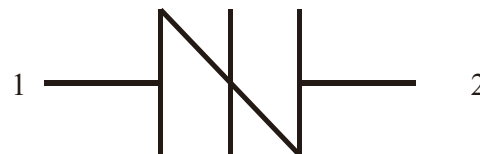

Thermal Characteristics (Ta=25°C Unless Otherwise Specified)

Parameter	Test Conditions	Symbol	Value	Unit
Operating Junction Temperature Range		T _J	-40 ~ 150	°C
Storage Temperature Range		T _{STG}	-40 ~ 150	
Thermal Resistance Junction To Ambient With Steady-State	Device Mounted On 1 in2 FR-4 Board With 2oz. Copper	R _{θJA}	90	°C/W

C-V Curve Chart And Parameter Instruction

	Parameter	Symbol	Instruction
	Peak Off-state Voltage	V _{DRM}	Maximum Voltage That Can Be Applied While Maintaining Off-State
	Switching Voltage	V _S	Maximum Voltage Prior To Switching To On-State
	On-state Voltage	V _T	Maximum Voltage Measured At Rated On-State Current
	Leakage Current	I _{DRM}	Maximum Peak Off-State Current Measured At V _{DRM}
	Switching Current	I _S	Maximum Current Required To Switch To On-state
	On-state Current	I _T	Maximum Rated Continuous On-State Current
	Holding Current	I _H	Minimum Current Required To Maintain On-State
	Off-state Capacitance	C _O	Typical Capacitance Measured In Off-State
	Peak Pulse Voltage	V _{PP}	Maximum Rated Peak Impulse Voltage
	Peak Pulse Current	I _{PP}	Maximum Rated Peak Impulse Current

PxxxxSx series
Thyristor Surge Suppressors(TSS)

Table-1.ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Part Number	Marking	V _{DRM} (V)	V _S (V)	V _T (V)	I _{DRM} (uA)	I _S (mA)	I _T (A)	I _H (mA)	C _{O-MAX} (pF)
P0060SA	P006A	5	15	4	5	800	2.2	50	50
P0060SB	P006B	5	15	4	5	800	2.2	50	70
P0060SC	P006C	5	15	4	5	800	2.2	50	100
P0080SA	P008A	6	25	4	5	800	2.2	50	50
P0080SB	P008B	6	25	4	5	800	2.2	50	70
P0080SC	P008C	6	25	4	5	800	2.2	50	100
P0300SA	P03A	25	40	4	5	800	2.2	50	70
P0300SB	P03B	25	40	4	5	800	2.2	50	70
P0300SC	P03C	25	40	4	5	800	2.2	50	100
P0640SA	P06A	58	77	4	5	800	2.2	150	50
P0640SB	P06B	58	77	4	5	800	2.2	150	60
P0640SC	P06C	58	77	4	5	800	2.2	150	100
P0720SA	P07A	65	88	4	5	800	2.2	150	50
P0720SB	P07B	65	88	4	5	800	2.2	150	60
P0720SC	P07C	65	88	4	5	800	2.2	150	100
P0900SA	P09A	75	98	4	5	800	2.2	150	45
P0900SB	P09B	75	98	4	5	800	2.2	150	55
P0900SC	P09C	75	98	4	5	800	2.2	150	90
P1100SA	P11A	90	130	4	5	800	2.2	150	45
P1100SB	P11B	90	130	4	5	800	2.2	150	55
P1100SC	P11C	90	130	4	5	800	2.2	150	90
P1300SA	P13A	120	160	4	5	800	2.2	150	45
P1300SB	P13B	120	160	4	5	800	2.2	150	55
P1300SC	P13C	120	160	4	5	800	2.2	150	90
P1500SA	P15A	140	180	4	5	800	2.2	150	40
P1500SB	P15B	140	180	4	5	800	2.2	150	60
P1500SC	P15C	140	180	4	5	800	2.2	150	85
P1800SA	P18A	170	220	4	5	800	2.2	150	40
P1800SB	P18B	170	220	4	5	800	2.2	150	60
P1800SC	P18C	170	220	4	5	800	2.2	150	85
P2300SA	P23A	190	260	4	5	800	2.2	150	35
P2300SB	P23B	190	260	4	5	800	2.2	150	55
P2300SC	P23C	190	260	4	5	800	2.2	150	80
P2600SA	P26A	220	300	4	5	800	2.2	150	35
P2600SB	P26B	220	300	4	5	800	2.2	150	50
P2600SC	P26C	220	300	4	5	800	2.2	150	80
P3100SA	P31A	275	350	4	5	800	2.2	150	30
P3100SB	P31B	275	350	4	5	800	2.2	150	45
P3100SC	P31C	275	350	4	5	800	2.2	150	65

PxxxxSx series
Thyristor Surge Suppressors(TSS)

Table-1.ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Part Number	Marking	V _{DRM} (V)	V _S (V)	V _T (V)	I _{DRM} (uA)	I _S (mA)	I _T (A)	I _H (mA)	C _{O-TYP.} (pF)
P3500SA	P350A	320	400	4	5	800	2.2	150	30
P3500SB	P350A	320	400	4	5	800	2.2	150	40
P3500SC	P350A	320	400	4	5	800	2.2	150	65
P4200SA	P420A	390	500	4	5	800	2.2	150	30
P4200SB	P420A	390	500	4	5	800	2.2	150	40
P4200SC	P420A	390	500	4	5	800	2.2	150	65

Model And Identification Instructions

	P	V V V V V	S	y
Product Type P=TSS				
V _{DRM} Spec. 3500=320V				
Package Code S=SMB,T=SMA				
Surge Ratings Code(I _{TSM} Spec.) y=A=20A,y=B=30A,y=C=50A				

Surge Ratings(y=A,y=B,y=C)

Item	I _{pp}					V _{pp}	I _{TSM}	di/dt
Conditions	2x10us	8x20us	10x160us	10x560us	10x1000us	10x700us	60Hz	/
Unit	A	A	A	A	A	V	A	A/us
A	150	150	90	50	45	2000	20	500
B	250	250	150	100	80	4000	30	500
C	500	400	200	150	100	6000	50	500

PxxxxSx series

Thyristor Surge Suppressors(TSS)



Typical Characteristics Curves

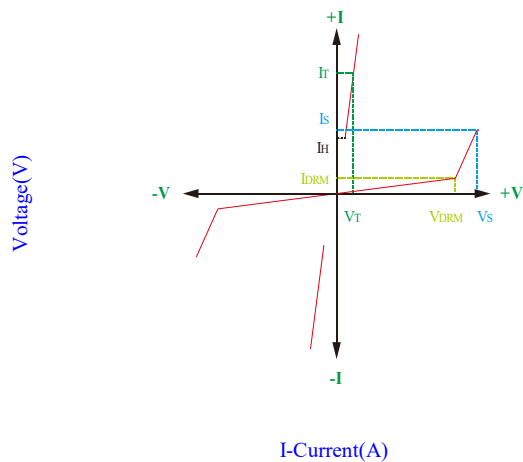


Fig.1- V-I Characteristics

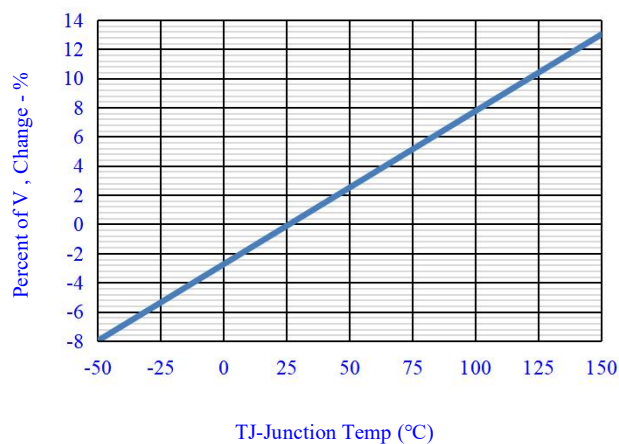


Fig.2-Normalized Vs.Change Versus Junction Temperature

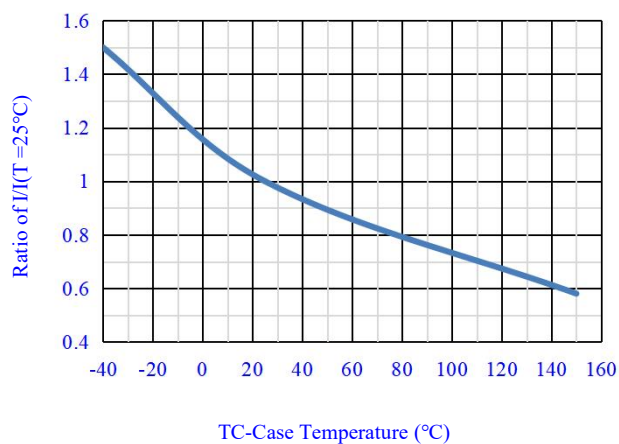


Fig.3-Normalized DC Holding Current Versus Case Temperature

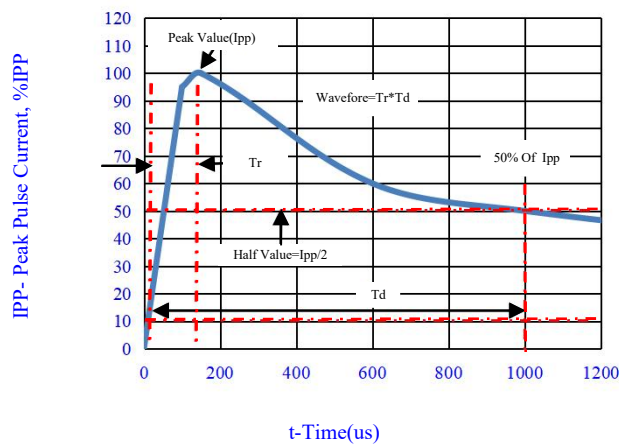



Fig.4-Pulse Waveform

PxxxxSx series

Thyristor Surge Suppressors(TSS)




OUTLINE DRAWINGS

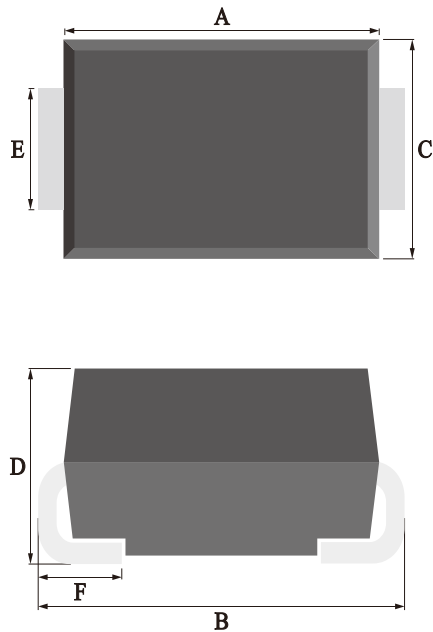

SMB

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.00	-	4.70	0.1575	-	1.8504
B	5.00	-	5.59	1.9685	-	2.2008
C	3.30	-	3.94	1.2992	-	1.5512
D	2.10	-	2.45	0.8268	-	0.9646
E	1.90	-	2.11	0.7480	-	0.8307
F	0.76	-	1.50	0.2992	-	0.5906

RECOMMENDED LAYOUT DRAWINGS

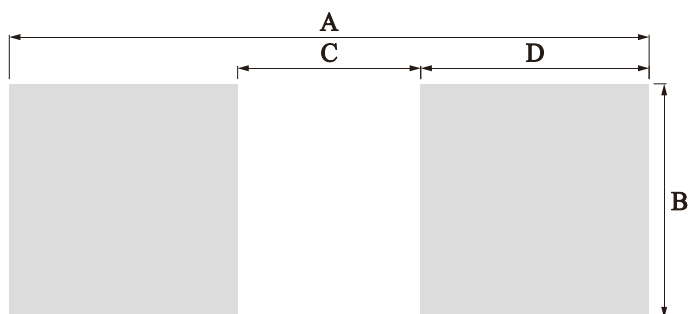

SMB


OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	6.34	-	-	2.4961	-
B	-	2.72	-	-	1.0709	-
C	-	1.76	-	-	0.6929	-
D	-	2.29	-	-	0.9016	-

PxxxxSx series

Thyristor Surge Suppressors(TSS)



MARKING

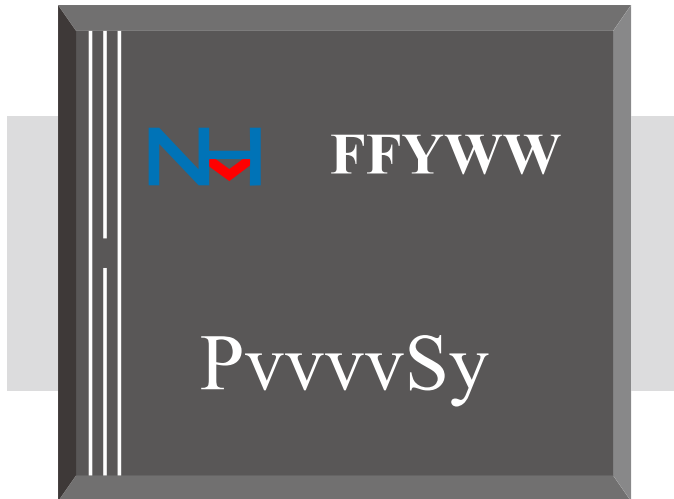

MARKING INSTRUCTION

NH=Niuhan Trademark


FF=Product Line Code,According To Actual Changes

YW=Date Code,According To Actual Changes

PvvvvSy=Make,vvvv=See Table-1,y=A,B,C

White band denotes cathode

PACKAGING

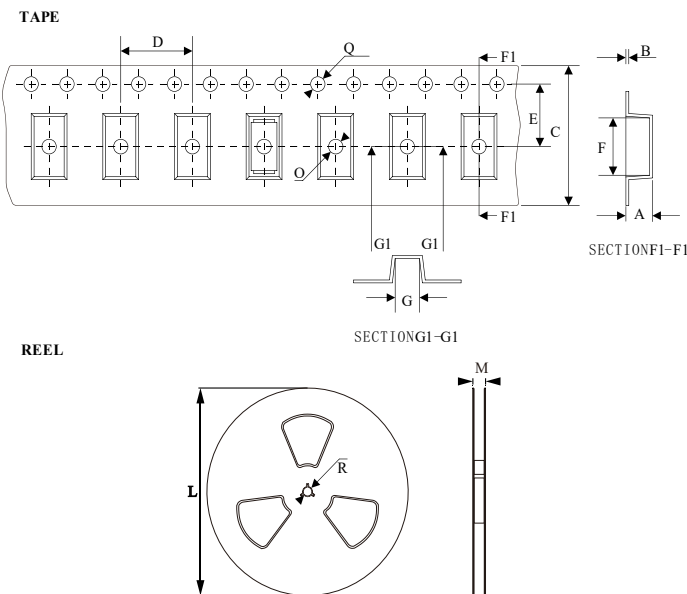

SMB

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
TAPE						
A	2.60	-	2.80	0.1024	-	0.1102
B	0.15	-	0.35	0.0059	-	0.0138
C	11.70	-	12.30	0.4606	-	0.4843
D	7.90	-	8.10	0.3110	-	0.3189
E	5.40	-	5.60	0.2126	-	0.2205
F	5.59	-	5.79	0.2201	-	0.2280
G	3.66	-	3.86	0.1441	-	0.1520
O Φ	1.50	-	1.60	0.0591	-	0.0630
Q Φ	1.50	-	1.60	0.0591	-	0.0630
REEL						
L	328.00	-	332.00	12.913	-	13.071
R	13.00	-	14.00	0.5118	-	0.5512
M	15.00	-	17.00	0.5906	-	0.6693

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
SMB	P1	0.095	13" Reel	3000	6000	48000
SMB	P1	0.095	13" Reel	3000	6000	60000

PxxxxSx series


Thyristor Surge Suppressors(TSS)



Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds

Recommended temperature profile for IR reflow

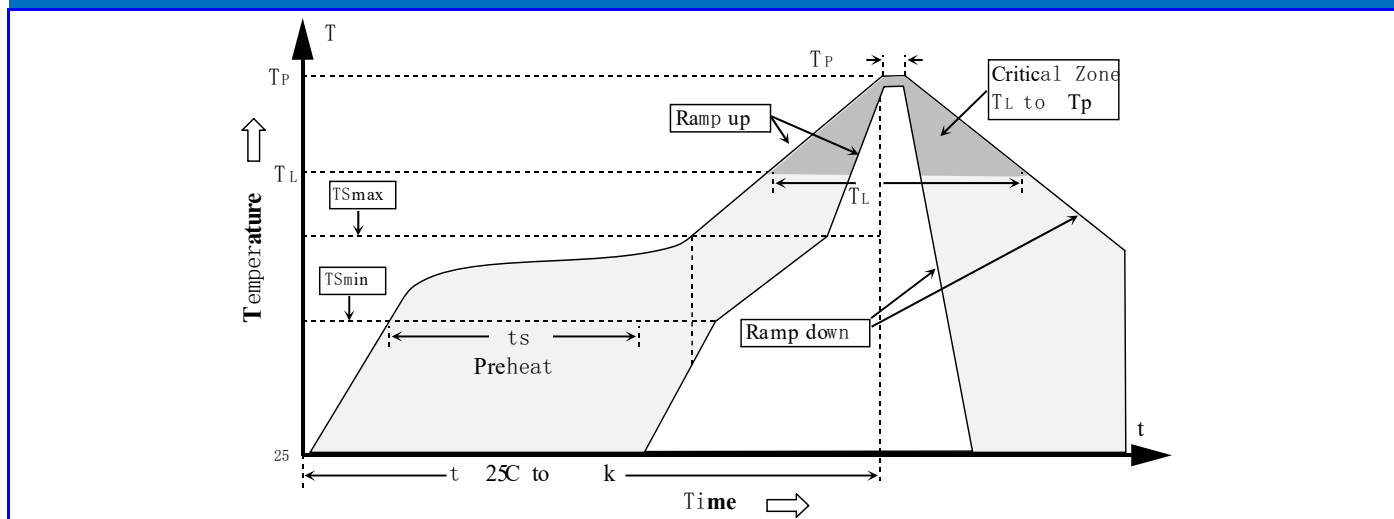

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T _{smax} to T _p)	3°C/second max.	3°C/second max.
Preheat -Temperature Min(TS min) -Temperature Max(TS max) -Time(ts min to ts max)	100°C 150°C 60-120 seconds	150°C 200°C 60-180 seconds
Time maintained above: -Temperature (T _L) - Time (t _L)	183°C 60-150 seconds	217°C 60-150 seconds
Peak Temperature(T _P)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

PxxxxSx series

Thyristor Surge Suppressors(TSS)



Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Niuhan Electronics Technology Co., LTD
- Niuhan Electronics Technology Co., LTD. reserves the rights to make changes of the content herein the document anytime without notification.
- Niuhan Electronics Technology Co., LTD. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Niuhan Electronics Technology Co., LTD. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Niuhan Electronics Technology Co., LTD. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Niuhan Electronics Technology Co., LTD. for any damages resulting from such improper use or sale.
- When the appearance of the product and chip size does not change, in order to product the customer. quality, change the internal structure and the production process Niuhan can not notify