




TO-247S


OUTLINE DRAWINGS

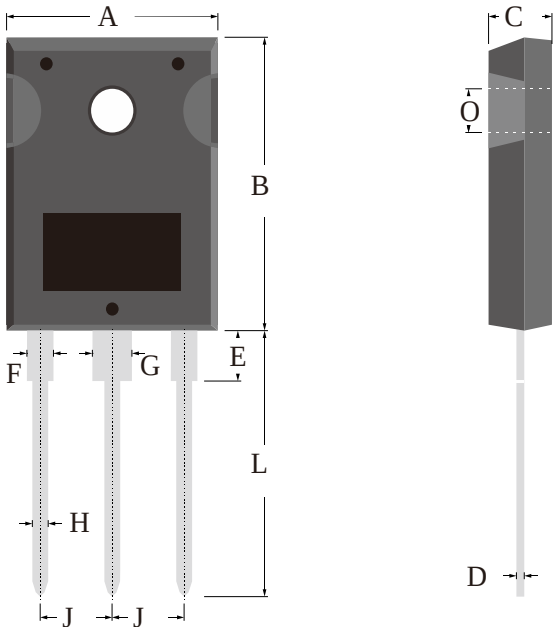

TO-247S

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.10	-	16.10	0.5945	-	0.6339
B	19.50	-	21.50	0.7677	-	0.8465
C	4.50	-	5.50	0.1772	-	0.2165
D	0.40	-	0.70	0.0157	-	0.0276
E	-	4.00	-	-	0.1575	-
F	1.80	-	2.20	0.0709	-	0.0866
G	2.80	-	3.20	0.1102	-	0.1260
H	1.00	-	1.40	0.0394	-	0.0551
J	5.20	-	5.80	0.2047	-	0.2283
L	13.50	-	15.00	0.5315	-	0.5906
O	3.40	-	3.80	0.1339	-	0.1496

RECOMMEDND LAYOUT DRAWINGS

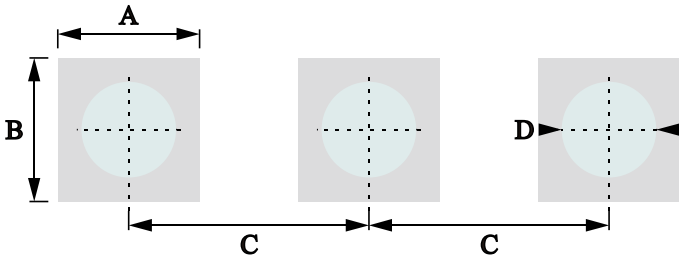


TO-247S

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	2.00	-	-	0.0787	-
B	-	2.00	-	-	0.0787	-
C	-	5.50	-	-	0.2165	-
D	-	1.40	-	-	0.0551	-

TO-247S

MARKING

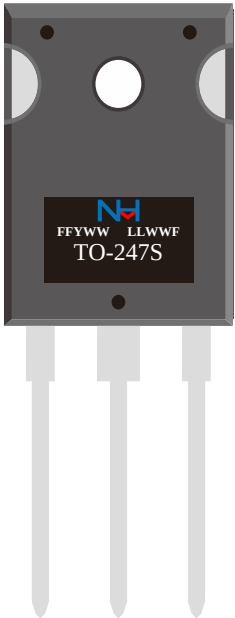

MARKING INSTRUCTION

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
TO-247S=Model

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
TO-247S	P1	4.385	Tube	30	450	2250