

BTA08A-800xW



THREE-QUADRANTS TRIAC

VOLTAGE: 800 Volts

CURRENT: 8.0 Amperes

Package: TO-220A

FEATURES

- Highly di/dt For High Reliability
- Low Thermal Resistance Insulation Ceramic For Insulated Package
- Very High Commutation Capability
- Packages Are RoHS (2011/65/EU) Compliant


TYPICAL APPLICATIONS

- Phase Control Operation Of Light Dimmers And Motor Speed Controllers
- ON/OFF Control Operation Of Heating Regulation And Induction Motor


PRODUCT SUMMARY

Gear	TW	SW	CW	BW	Unit
$I_{GT(I-II-III)} \text{ Max.}$	5	10	35	50	mA
$V_{DRM}/V_{RRM} \text{ Min.}$	800				V
$I_{T(RMS)}$	8.0				A

Diagram:

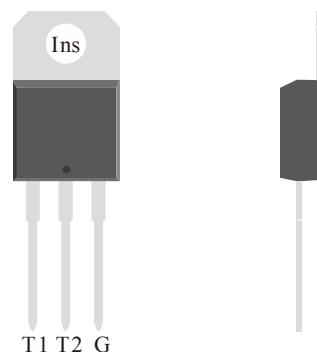

Polarity:



Absolute Maximum Ratings (Ta=25°C Unless otherwise specified)

Parameter	Test Conditions	Symbol	Ratings	Unit
Repetitive Peak Off-State Voltage		V_{DRM}	800	V
Repetitive Peak Reverse Voltage		V_{RRM}	800	V
RMS On-State Current	$T_c \leq 86^\circ\text{C}$	$I_{T(RMS)}$	8.0	A
Non Repetitive Surge Peak On-State Current	F= 50 Hz, $T_p = 20 \text{ ms}$	I_{TSM}	80	A
	F= 60 Hz, $T_p = 16.6 \text{ ms}$		88	
I^2T Value For Fusing	$T_p = 10 \text{ ms}$	I^2t	32	A
Critical Rate Of Rise Of On-State Current	$IG=2*IGT, tr \leq 100\text{ns}$	di/dt	50	A/ μs
	F= 100 Hz, $T_j = 125^\circ\text{C}$			
Peak Gate Current	$T_p = 20 \mu\text{s}, T_j = 125^\circ\text{C}$	I_{GM}	4.0	A
Average Gate Power Dissipation	$T_j = 125^\circ\text{C}$	$P_{G(AV)}$	0.5	W
Peak Gate Power Dissipation		P_{GM}	10	W
Maximum Mounting Torque	M3 srew	T_{MM}	1.1	N.m

Thermal Characteristics (Ta=25°C Unless otherwise specified)

Parameter	Test Conditions	Symbol	Typ.	Unit
Operating Junction Temperature Range		T_j	-40 to 125	$^\circ\text{C}$
Storage Temperature Range		T_{STD}	-40 to 150	
Thermal Resistance Junction To Ambient With Steady-State	Still Air Environment With $T_a = 25^\circ\text{C}$	$R_{\theta JA}$	60.0	$^\circ\text{C/W}$
Thermal Resistance Junction-Case With Steady-State	Device Mounted On 75mm x 45mm x 2.5mm Alu. Heat.	$R_{\theta JC}$	2.5	

BTA08A-800xW



THREE-QUADRANTS TRIAC

Electrical Characteristics (Ta=25°C Unless otherwise specified)

Parameter	Test Conditions	Symbol	Quadrant	Value					Unit
					TW	SW	CW	BW	
Gate Trigger Current	$V_D=12V, R_L=33\Omega$	I_{GT}	I - II - III	Max.	5	10	35	50	mA
Max. Gate Trigger Voltage	$V_D=12V, R_L=33\Omega$	V_{GT}	I - II - III	Max.	1.3				V
Min. Gate Trigger Voltage	$V_D=V_{DRM}, T_j=125^\circ C, R_L=3.3K\Omega$	V_{GD}	I - II - III	Min.	0.2				V
Holding Current	$I_T=100\text{ mA}$	I_H		Max.	10	15	35	50	mA
Latching Current	$I_G=1.2 \cdot I_{GT}$	I_L	I - III	Max.	10	25	50	50	mA
			II	Max.	15	30	60	90	
Rise Of Off- State Voltage	$V_D=V_{DRM}, T_j=125^\circ C, \text{Gate Open}$	dv/dt		Min.	80	400	500	1000	V/us

Static Characteristics (Ta=25°C Unless otherwise specified)

Parameter	Test Conditions	Symbol	T_j	Value		Unit
Peak On-State Voltage	$I_T=11\text{ A}, t_p=380\text{ us}$	V_{TM}	25°C	Max.	1.5	V
Threshold Voltage		V_{TO}	125°C	Max.	0.80	V
Dynamic resistance		R_D	125°C	Max.	44	mΩ
Peak Repetitive Forward Blocking Current	$V_D=V_{DRM}$	I_{DRM}	25°C	Max.	5	uA
	$V_D=V_{DRM}$		125°C		1.0	mA
Peak Repetitive Reverse Blocking Current	$V_R=V_{RRM}$	I_{RRM}	25°C	Max.	5	uA
	$V_R=V_{RRM}$		125°C		1.0	mA

Model and identification instructions

	BT	A	08	A	-	800	xW
Product Type	BT=Triac						
Insulation Spec.:	A=Ins.=Insulation B=No Ins.=No Insulation						
$I_{T(RMS)}$ Spec.:	08=8A						
Package Spec.:	A=TO-220A						
"-."=Connection Symbol Constant And Unchanging							
V_{DRM}/V_{RRM} Spec.	800=800V						
I_{GT} Spec.	TW:IGT I - II - III=5mA SW:IGT I - II - III=10mA CW:IGT I - II - III=35mA BW:IGT I - II - III=50mA						

BTA08A-800xW



THREE-QUADRANTS TRIAC

Typical Characteristics Curves

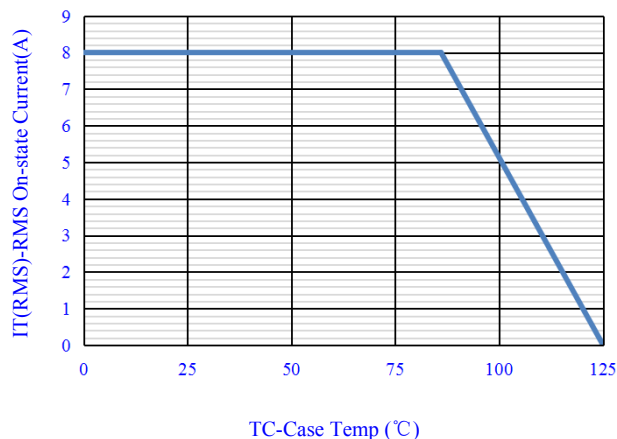


Fig.1-RMS on-state current vs. case temperature

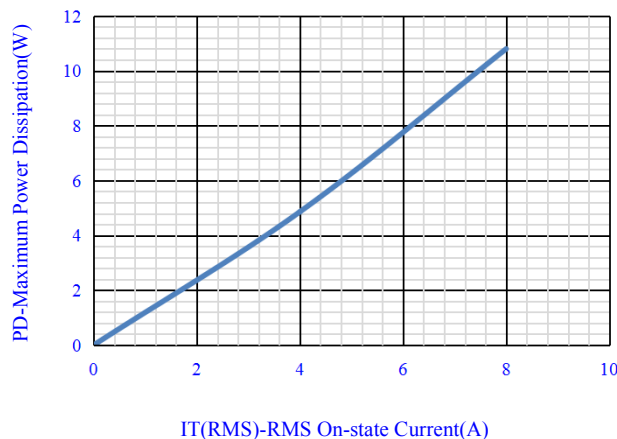


Fig.2- Maximum Power Dissipation Vs. on-state current

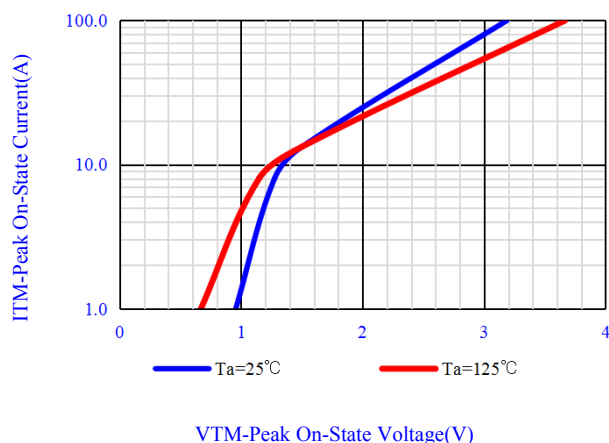


Fig.3-On-State Characteristics

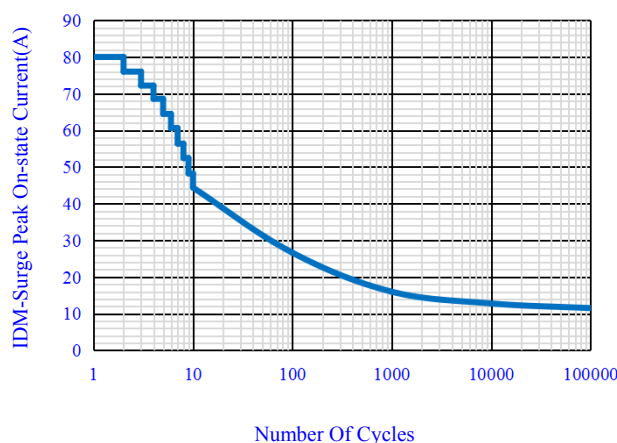


Fig.4- Surge Peak On-state Current Vs. Number Cycles

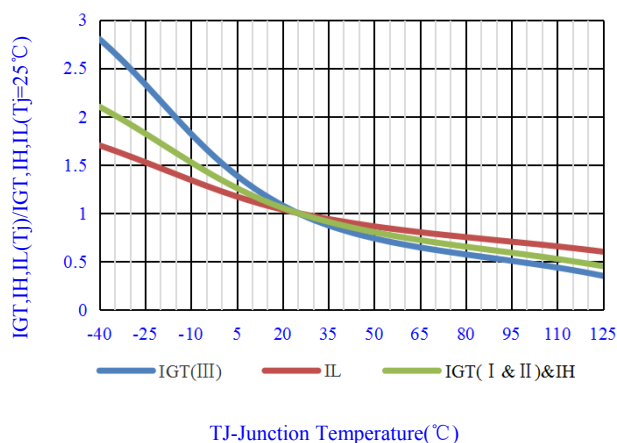


Fig.5- Relative Variation Of Gate Trigger Current , Holding Current And Latching Current Versus Junction Temperature (Typical Value)

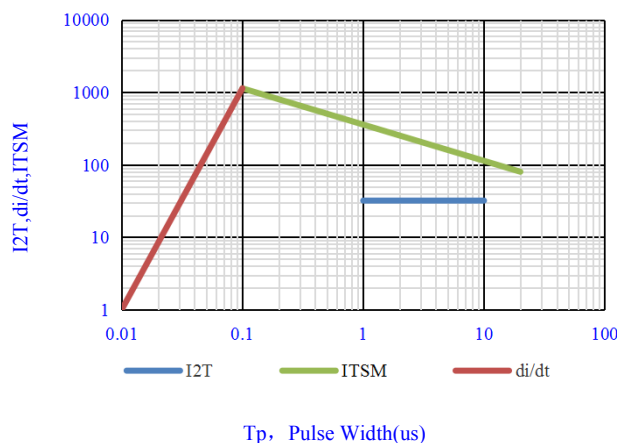



Fig.6- Non-repetitive surge peak on-state current for a sinusoidal pulse with width $t_p < 20\text{ms}$, and corresponding value of I_2t ($dI/dt < 50\text{A}/\mu\text{s}$)

BTA08A-800xW
THREE-QUADRANTS TRIAC



OUTLINE DRAWINGS


TO-220A

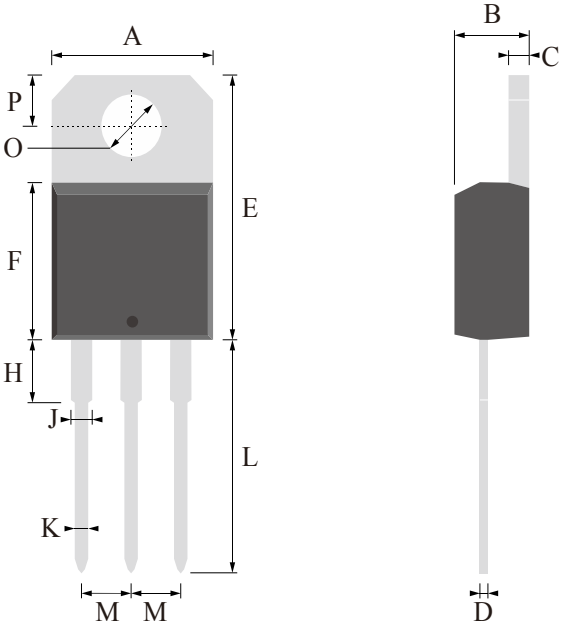

OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	9.25	-	10.75	0.3642	-	0.4232
B	4.20	-	4.70	0.1654	-	0.1850
C	1.15	-	1.45	0.0453	-	0.0571
D	0.45	-	0.65	0.0177	-	0.0256
E	14.70	-	16.70	0.5787	-	0.6575
F	8.55	-	10.05	0.3366	-	0.3957
L	12.50	-	14.50	0.4921	-	0.5709
H	3.00	-	4.00	0.1181	-	0.1575
J	1.20	-	1.40	0.0472	-	0.0551
K	0.70	-	1.00	0.0276	-	0.0394
M	2.20	-	3.00	0.0866	-	0.1181
O	3.45	-	4.15	0.1358	-	0.1634
P	2.40	-	3.40	0.0945	-	0.1339

RECOMMEDND LAYOUT DRAWINGS

TO-220A

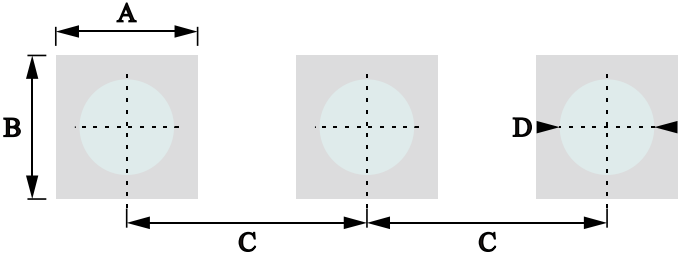


OUTLINE DIMENSIONS						
Dim.	Milimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	-	1.60	-	-	0.0630	-
B	-	1.60	-	-	0.0630	-
C	-	2.54	-	-	0.1000	-
D	-	1.00	-	-	0.0394	-

BTA08A-800xW

THREE-QUADRANTS TRIAC



MARKING INFORMATION

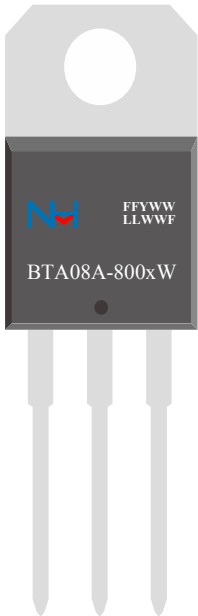

MARKING INSTRUCTIONS

NH=Niuhang Trademark
FF=Product Line Code,According To Actual Changes
YWW=Date Code,According To Actual Changes
LLWWF=Inernal Code,According To Actual Changes
BTA08A-800xW=Model,x=T,S,C,B

PACKING INFORMATION

Package Type	Package Code	Product Weight Approx(g/Pcs)	Package Method	Quantity (Pcs/Min. Pack.)	Quantity (Pcs/Inner Box)	Quantity (Pcs/Carton)
TO-220A	P1	2.057	Tube	50	1000	5000

BTA08A-800xW


THREE-QUADRANTS TRIAC



Recommended wave soldering condition

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds

Recommended temperature profile for IR reflow

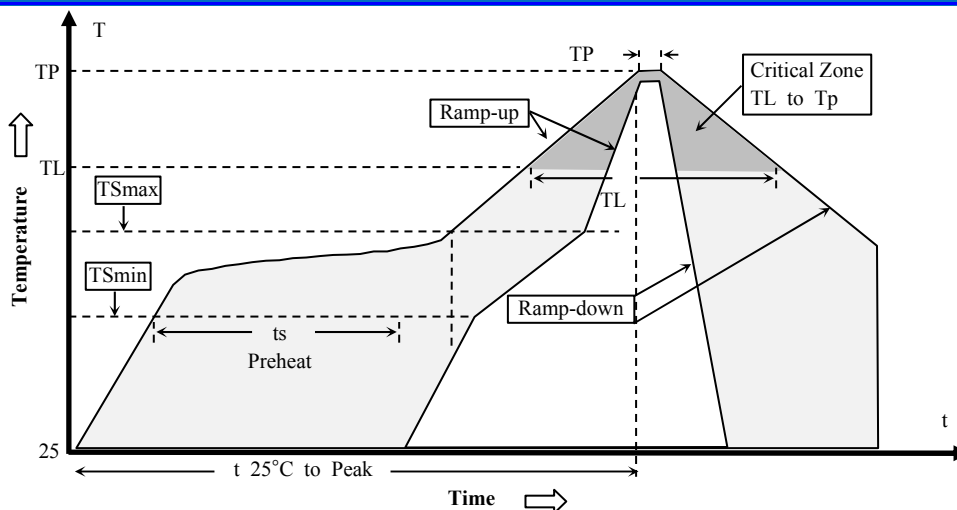

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T _{smax} to T _p)	3°C/second max.	3°C/second max.
Preheat -Temperature Min(TS min) -Temperature Max(TS max) -Time(ts min to ts max)	100°C 150°C 60-120 seconds	150°C 200°C 60-180 seconds
Time maintained above: -Temperature (TL) - Time (tL)	183°C 60-150 seconds	217°C 60-150 seconds
Peak Temperature(TP)	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.